



## Double Pilot Valve,



### Function:

Pressure on the pilot port individually actuates the spool of the valves and retains its position even the pilot signal is removed.

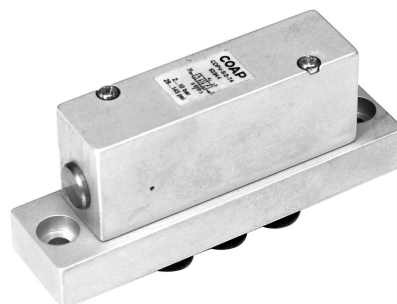

### Technical Data:

<b>Type</b>	<b>CDPV-5/2-T4</b>
Art. no.	63944
Connection	Ø4mm
Valve function	5/2-way
Design	Piston spool
Type of mounting	Via through-holes
Norminal dia (mm)	3
Std. nominal flow rate (l/min)	280
Operating medium	Filtered compressed air, lubricated or unlubricated
Operating pressure range	2...10 bar
Pilot pressure	2,5 bar
Temperature range	-10...+60 °C
Materials	Body: Wrought aluminium alloy, anodised; Seals: Nitrile rubber
Weight (g)	60

### Dimensions (mm):

