



Single Solenoid Valve,
 With manual override, air spring return



Function:

When the coil is energized, the valve shifts its normal position & remains shifted until the coil is de-energized.

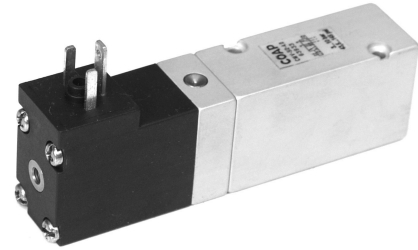

Technical Data:

Type	CMV-5/2-4.0
Art. no.	63933
Connection	Ø 4mm
Valve function	5/2 way
Design	Piston spool
Type of mounting	Via through-holes
Norminal dia (mm)	4
Std. nominal flow rate (l/min)	450
Operating medium	Filtered compressed air, lubricated or unlubricated
Operating pressure range	3...10 bar
Temperature range	-10...+60 °C
Operating voltage	24 V DC; 24, 230 (50...60 Hz) VAC
Power consumption	DC voltage 1,8 W; AC voltage 3,6 VA
Protection class	IP 65
Materials	Body: Wrought aluminium alloy, anodised; Seals: Nitrile rubber
Weight (g)	100

Dimensions (mm):

