



Single Solenoid Valve,
With manual override, air spring return



Function:

When the coil is energized, the valve shifts its normal position & remains shifted until the coil is de-energized.

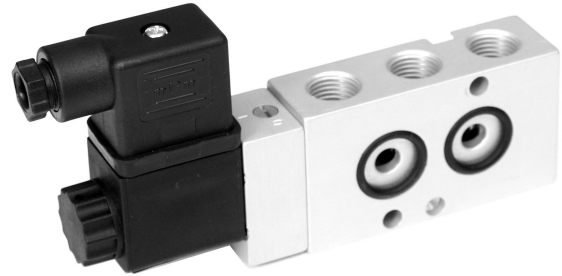

Technical Data:

Type	PMVN-5-1/4
Art. no.	63963
Connection	G1/4
Valve function	5/2 way
Design	Piston spool
Type of mounting	Via through-holes
Normal dia (mm)	7
Std. nominal flow rate (l/min)	1250
Operating medium	Filtered compressed air, lubricated or unlubricated
Operating pressure range	1,5...10 bar
Temperature range	-10...+60 °C
Operating voltage	12, 24, 48, V DC; 24,110, 230 (50...60 Hz) VAC
Power consumption	DC voltage 3 W; AC voltage 5 VA
Protection class	IP 65
Materials	Body: Wrought aluminium alloy, anodised; Seals: Nitrile rubber
Weight (g)	270

Note: For magnetic coils see sheet 4.6.1

Dimensions (mm):

