


Exhaust Flow Control Valve,
With sintered metal silencer

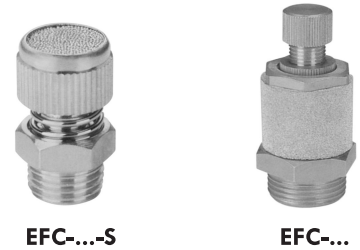

Function:

These valves are used to control the flow of exhaust air through release port of the valve.

Technical Data:

Type	EFC-1/8	EFC-1/4	EFC-3/8	EFC-1/2	EFC-3/4	EFC-1
Art. No.	28314	28316	28318	28320	28321	28322
Connection	1/8"	1/4"	3/8"	1/2"	3/4"	1"
Noise level at 6 bar (dB)	88	85	85	83	80	80
Fluid	Compressed air lubricated or non-lubricated					
Pressure range	Max. 10 bar					
Temperature range	-10...+70 °C					
Material	Sintered bronze / brass					

Dimensions (mm):

Type	A	F	H	L	CH
EFC-1/8	1/8"	5.5	10	38	12
EFC-1/4	1/4"	7.5	12	38	14
EFC-3/8	3/8"	7.5	15	46	17
EFC-1/2	1/2"	14	22	57	24
EFC-3/4	3/4"	11	23	69	27
EFC-1	1"	12.5	34	82	34

Technical Data:

Type	EFC-1/8-S	EFC-1/4-S	EFC-3/8-S	EFC-1/2-S
Art. No.	28313	28315	28317	28319
Connection	1/8"	1/4"	3/8"	1/2"
Noise level at 6 bar (dB)	72	73	84	88
Fluid	Compressed air lubricated or non-lubricated			
Pressure range	Max. 10 bar			
Temperature range	-10...+70 °C			
Material	Sintered bronze / brass			

Dimensions (mm):

Type	A	B _(MIN)	B _(MAX)	F	CH
EFC-1/8-S	1/8"	15	20	6	12
EFC-1/4-S	1/4"	20	25	7.5	15
EFC-3/8-S	3/8"	25	30	9	19
EFC-1/2-S	1/2"	25	30	10.5	22