


## Rilsan Spiral

These tubes have excellent return speed and flow rate, great resistance to mechanical abrasion, hydrocarbons and their derivatives and ageing effect of sunlight and heat.



Order example:

RLS - 6x4 - OR


Type   Colour  

### Technical Data:

Type	Art. No.	Outside $\varnothing$ (mm)	Inside $\varnothing$ (mm)	Min. bending pressure (bar)	Max. working pressure at 20 °C (bar)	Tubing colour
RLS-4x2	47815	4	2	133	33	BL=Blue OR=Orange NL=Natural
RLS-6x4	47816	6	3	80	20	
RLS-8x6	47817	8	6	57	14	
RLS-10x8	47818	10	8	44	11	
RLS-12x10	47819	12	10	36	9	

Standard length available: 7,5 - 10 - 12 - 15 - 20 - 24 - 30 meters.

### Dimensions (mm):

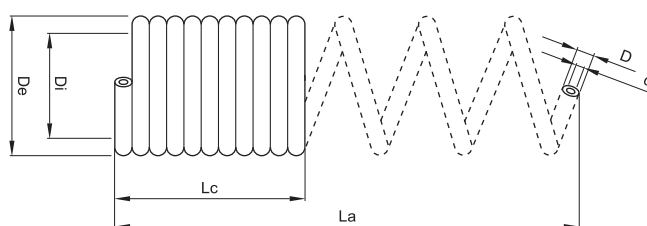

D	d	De	Di	L = 7,5 mtr.		L = 10 mtr.		L = 12 mtr.		L = 15 mtr.		L = 20 mtr.		L = 24 mtr.		L = 30 mtr.	
				Lc	La	Lc	La	Lc	La	Lc	La	Lc	La	Lc	La	Lc	La
4	2	50	42	205	3750	273	5000	328	6000	410	7500	546	10000	656	12000	820	15000
6	4	64	52	250	3750	333	5000	400	6000	500	7500	666	10000	800	12000	1000	15000
8	6	86	70	250	3750	333	5000	400	6000	500	7500	666	10000	800	12000	1000	15000
10	8	105	85	262	3750	350	5000	420	6000	525	7500	700	10000	840	12000	1050	15000
12	10	134	110	250	3750	333	5000	400	6000	500	7500	666	10000	800	12000	1000	15000

Subject to change